



TECHNICAL DATASHEET

ACTIVACT CARBONS™

Granular activated carbon

Activact carbons™ is a medium activity granular activated carbon manufactured from a sustainable raw material source. Its enhanced microporosity makes

it particularly well suited for the removal of low molecular weight organic compounds and their chlorinated by-products such as chloroform and other trihalomethanes (THM's). It is also ideally suited for the removal of oxidizing agents such as chlorine and ozone from process water. An important feature of this material is its superior mechanical hardness and the extensive dedusting during its manufacture that ensures an exceptionally clean activated carbon product.



SPECIFICATION*

Iodine number	min. 1000 mg/g
Moisture content, as packed	max. 5%
CTC adsorption	min. 50%
Total ash content	max. 4%
Hardness	min. 98%
Apparent density	min. 430 kg/m ³

TYPICAL PROPERTIES*

Surface area	1050 m ² /g
Dechlorination half-length value (12x40 mesh)	1.8 cm
Apparent density	540 kg/m ³
Apparent density, backwashed and drained	470 kg/m ³

PARTICLE SIZE (mesh)	20x50	12x40	10x20	8x30	8x16
Oversize	<5%	<5%	<5%	<5%	<5%
Undersize	<4%	<4%	<4%	<4%	<4%
Effective size	0.4 mm	0.6 mm	1.0 mm	1.0 mm	1.2 mm
Mean particle diameter	0.5 mm	1.0 mm	1.4 mm	1.4 mm	1.9 mm
Uniformity co-efficient	<1.6	<1.7	<1.7	<1.6	<1.4

Features and Benefits

- Highly microporous structure
- Maximum hardness
- Excellent adsorption capacity
- High volume activity
- Rapid dechlorination
- Effective removal of ozone
- Low filtered water turbidity

Available Particle Sizes

- 20x50 mesh (0.85 - 0.30mm)
- 12x40 mesh (1.70 - 0.425mm)
- 10x20 mesh (2.00 - 0.85mm)
- 8x30 mesh (2.36 - 0.60mm)
- 8x16 mesh (2.36 - 1.18mm)
- 6x12 mesh (3.35 - 1.70mm)

Certifications and Approvals

- AWWA B604-05
- EN12915
- NSF Std. 61
- Halal certified
- Kosher certified
- Food chemical codex

Standard Packaging

- 25 kg bag (55 lb)
- 500 kg bulk bag (1100 lb)

Polypropylene liner-free FIBCs (super sacks), two bags per pallet or polyethylene valvesacks, twenty sacks per pallet.

* SPECIFICATIONS AND TYPICAL PROPERTIES ARE PRODUCED USING ACTIVACT CARBONS' TEST METHODS. THEY ARE LISTED FOR INFORMATIONAL PURPOSES ONLY AND NOT TO BE USED AS PURCHASE SPECIFICATIONS. SALES SPECIFICATIONS CAN BE OBTAINED FROM YOUR ACTIVACT CARBONS TECHNICAL SALES REPRESENTATIVE AND SHOULD BE REVIEWED BEFORE PLACING AN ORDER.



Visit: www.activact.com







Activact carbons 8x30 mesh

BED EXPANSION DURING BACKWASH

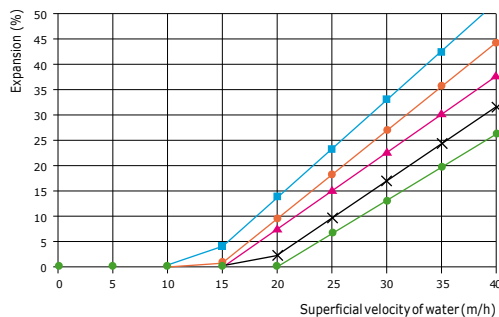



DOWNFLOW PRESSURE LOSS

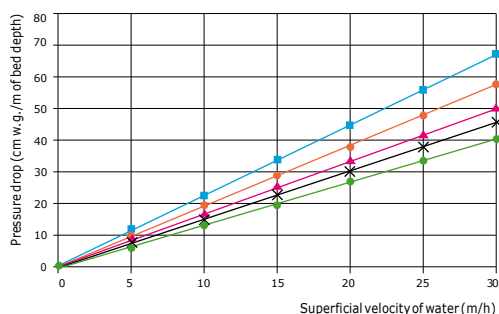



Activact carbons 10x20 mesh

BED EXPANSION DURING BACKWASH

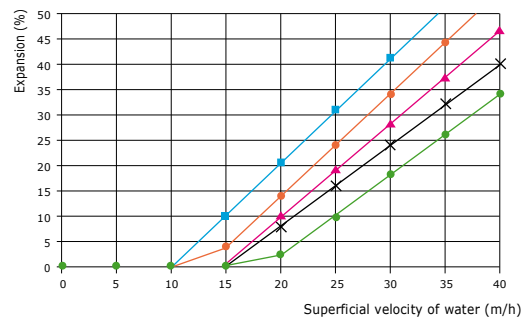



DOWNFLOW PRESSURE LOSS

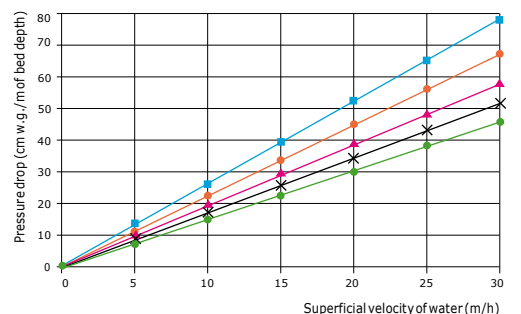



Activact carbons 12x40 mesh

BED EXPANSION DURING BACKWASH

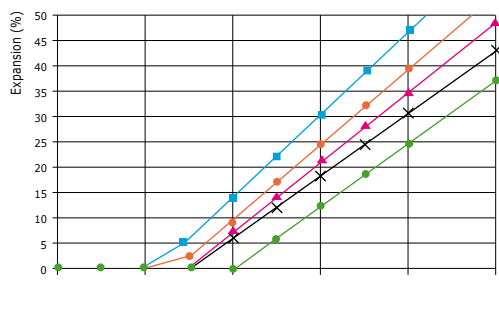

DOWNFLOW PRESSURE LOSS

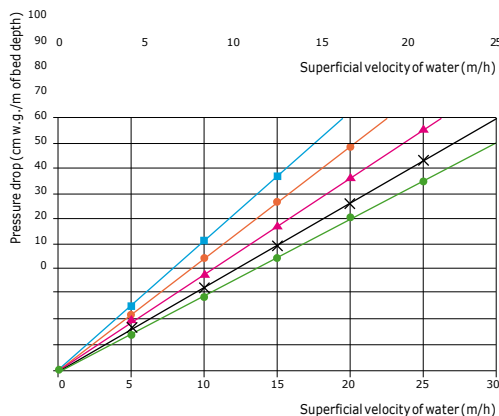

PRODUCTION CAPABILITY

The Activact Carbons Group of companies owns and operates manufacturing facilities in nine countries around the world. We produce in excess of 70,000 metric tonnes of high quality activated carbons based on coal and wood, by both chemical and steam (physical) activation methods. Our facilities are state-of-the-art, and are the most modern production units of their type. Intensive investment in these has ensured that products are manufactured to the most exacting quality standards demanded by our customers.

TECHNICAL SUPPORT AND KNOW-HOW

One of the distinguishing features of Activact Carbons is the extremely high level of technical competence within the company. Stand-alone product and technical service departments are staffed by industry-leading specialists in the field of activated carbon application and research. Dedicated laboratory facilities in Europe and North America work with our clients to ensure the optimum result is achieved from the use of our activated carbon products.

BED EXPANSION AND PRESSURE LOSS CURVES ARE PROVIDED FOR THE MOST COMMONLY USED PARTICLE SIZES. CHARTS ARE AVAILABLE FOR ALL PARTICLE SIZES ON REQUEST.

For more information or to contact Activact carbons visit: www.activact.com



NOTICE Due to the progressive nature of the activact carbons group and the continually improving design and performance of our products, we reserve the right to change this product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by activact carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customers use. Activact carbons assumes no obligation or liability for the usage of the information in this datasheet, no warranties or warranties, expressed or implied are provided. Activact carbons disclaims responsibility and the must accept full responsibility for performance of systems based on this data. ©copyright2012 Activact, activact carbons are trade marks of activact carbons, all of which may or may not be used in certain jurisdictions.

ACTIVACT-TDS-ACTIVACTCARBONS-TM-A4-ENG10919